

MINI MIKE MINIATURE SLIDE SWITCHES

This rugged, long life miniature slide switch is ideal for applications where exceptional quality and reliability are needed. Available in SPDT and DPDT configurations, these gold contact slide switches come with PC terminals.



APPLICATIONS:

- Medical controls
- Test equipment
- Datacom
- Precision instrumentation

KEY FEATURES:


- SPDT and DPDT circuits
- Gold Contacts
- PC terminals
- Temperature range: -40°C to +100°C
- Some versions UL recognized
- CSA Approved

ORDERING INFORMATION:


Part Number	Circuit	Button Height	Terminal Configuration	Rating
023-021-105	SPDT	0.20	2	250 mA@30 VDC
023-021-114	DPDT	0.20	3	100 mA@ 125 VDC
023-021-304*	SPDT (Form Z)	0.14	4	500 mA@30 VDC

* UL recognized. 0.5A @ 125VAC, 75 VDC


023-021-114

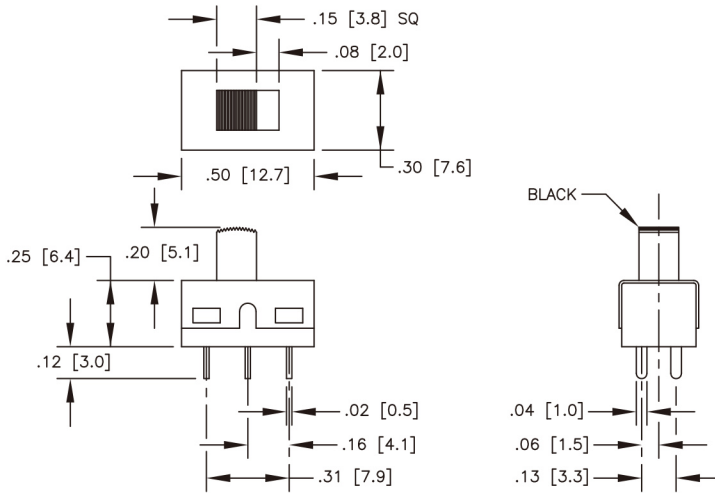

023-021-105

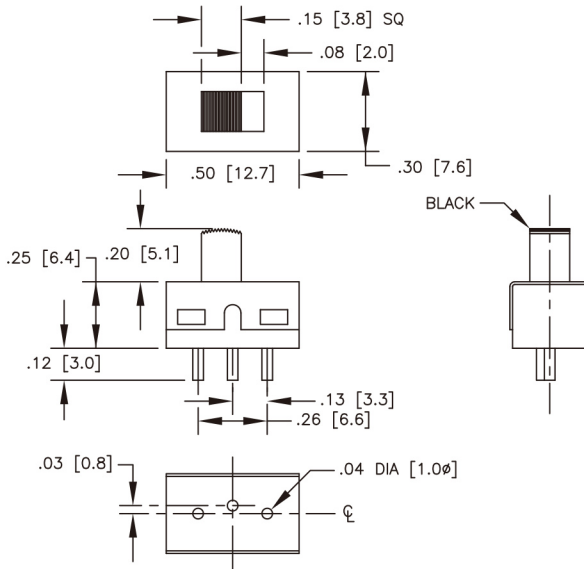

023-021-304

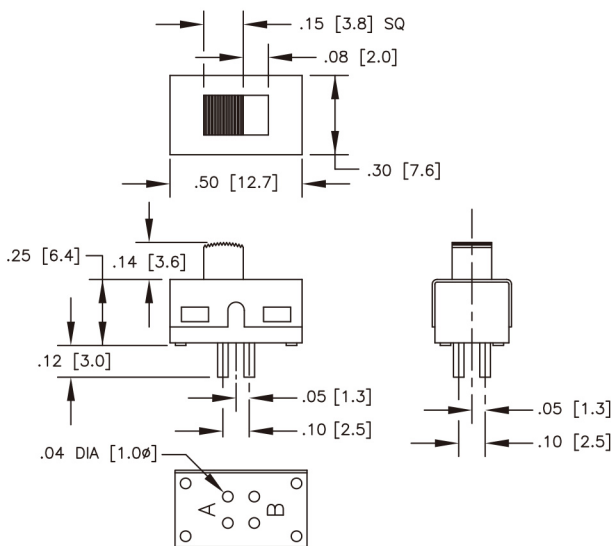

MECHANICAL / ELECTRICAL CHARACTERISTICS:

Circuit:

SPDT (023-021-105) (Form C)
 DPDT (023-021-114) (Form CC)
 SPDT-DB (023-021-304) (Form Z)

Operating force:

200-500g grams (023-021-114)
 100-500 grams (023-021-105 & 304)

Electrical rating:

100 milliamps 125 VDC (023-021-114)
 250 milliamps 30 VDC (023-021-105)
 0.5 amp 125 VAC (023-021-304)

Contact resistance:

20 milliohms max initially

Temperature rating:

-40°F to 212°F (-40°C to 100°C)

Life:

100,000 actuations

Contact material:

Hard gold over barrier